469 INVISIDO®

Unobtrusive aluminium interior door louvre, Dnew 28dB

Material properties	Standard version
Material	Aluminium, alloy EN AW-6063 T66
UPVC end caps	Grey, black or white
Surface treatment	Anodised (20 microns), chemically etched F1-E6 natural colour
Mounting	Mounting screws included
Dimensions	
For panel thicknesses between	+/- 35 mm
Minimum length	500 mm
Maximum length	2000 mm

Performance	
Noise reduction dB	
$D_{n,e,w}$ $(C;C_{tr})$	28 (-1;0)

Stock models

Dimensions (W x H) mm	Natural colour anodised F1	Renson standard WHITE	RAL 9005	RAL 1015	flow rate at 2 Pa (m³/h)	flow rate at 10 Pa (m³/h)	flow rate at 20 Pa (m³/h)
725 × 24	16246	10858	8702	16247	22.23	49.74	70.30
825 × 24	8323	8324	8703	10859	25.30	56.60	80.00
925 × 24	16248	16249	10860	8704	28.37	63.46	89.7

Section drawings

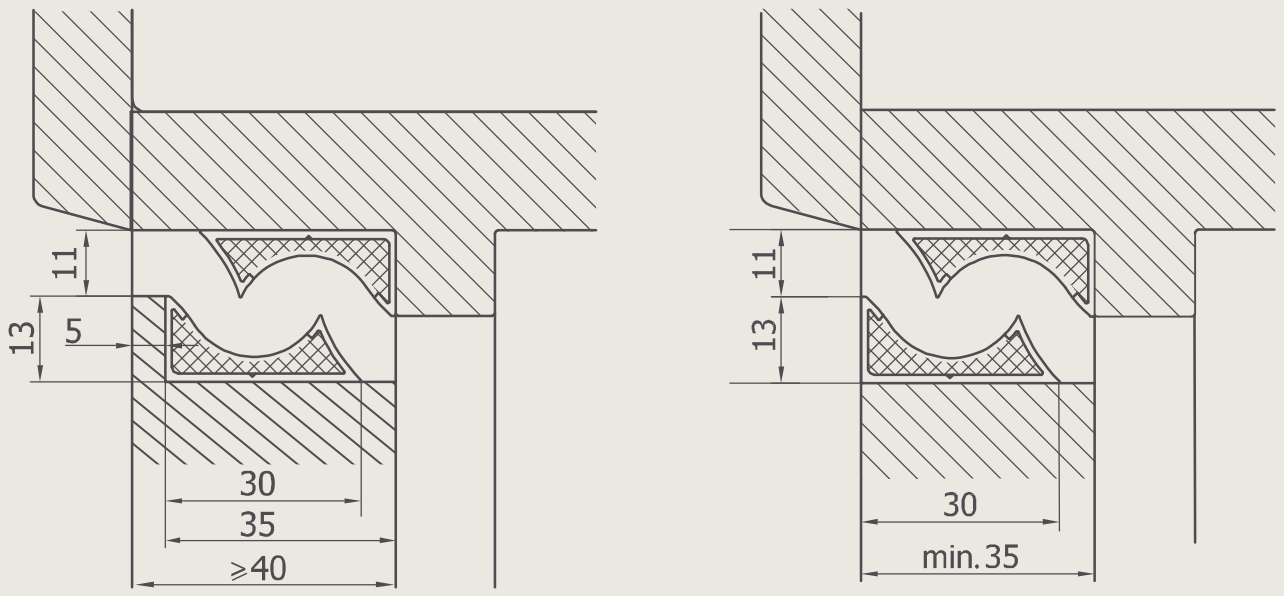

Available options

- **Finish:** Powder coating: non-standard powders