


461

Aluminium non-see-through door louvre with high air flow for door panels between 30 and 80 mm thick.



Material properties		Standard version
Material		Aluminium, alloy EN AW-6063 T66
Surface treatment		Anodised (20 microns), chemically etched F1-E6 natural colour
Wall bracket type		Mounting screws included
Dimensions		
Blade pitch		20 mm
Flange		15 mm
Door thickness		30 - 54 mm
Minimum dimensions (W x H)		200 mm x 76 mm
Maximum width		800 mm
Maximum height		1200 mm
Maximum louvre surface area		0.96 m²

Performance		
Airflow rate		
Physical free area		39%
Visual free area		93%
Air supply	Resistance factor K	34.6
	Flow coefficient C	0.170
	Airflow rating	4
Air extraction	Resistance factor K	34.6
	Flow coefficient C	0.170
	Airflow rating	4

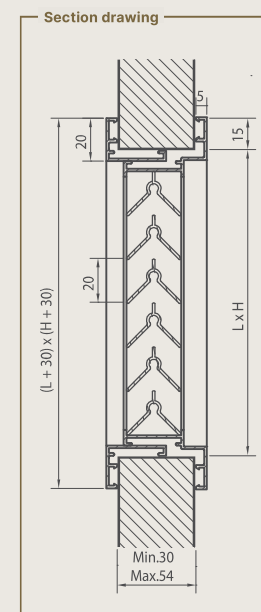

Stock models						
Dimensions (W x H) mm	Natural colour anodised	Renson Standard WHITE	RAL8019	flow rate at 2 Pa (m³/h)	flow rate at 10 Pa (m³/h)	flow rate at 20 Pa (m³/h)
200 × 100	17369			19.3	43.2	61
400 × 200	9093	9139	17404	83.8	187.4	265
400 × 300	17370			127.9	286	404.5
500 × 300	9094			160.7	359.3	508.2
600 × 400	11933			260.1	581.6	822.5
425 × 76	17359	9082	11923	31.0	69.3	98

Available options

- Finish:** Anodised: layer thickness 25 microns / other colours / other textures (E1-E10)
- Counterframe for panel thicknesses between 55 mm and 80 mm**
- Closable**
- Control:** Sliding knob / Rotary knob