


Technical data

Design	
Head box (HxD)	150 mm x 195 mm
Side guiding channels (WxD)	60 mm x 75 mm
Bottom bar (HxD)	100 mm x 62 mm
Wind resistance	
Windclass EN 13561:2004+A1:2008	3
Control	
Detecto Renson Safety First motor	–
Somfy, mechanical limit switches	✓
Somfy, io radio-controlled	✓
Dimensions	
Min. width	1200 mm
Max. width	5000 mm
Max. projection	6000 mm
Max. surface	30 m ²

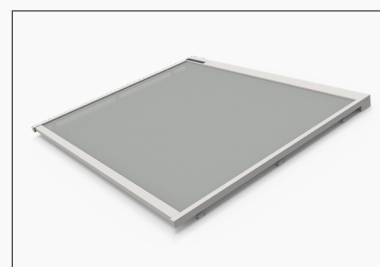


Fabrics


			POLYESTER			ACRYL	
Inclination angle	Width	Projection	Soltis Horizon 86	Soltis Perform 92	Soltis Opaque B92	Sattler Twilight Comfort (4%)	Sattler Twilight Elements (0%)
Inclination ≤ 8°	≤ 5000 mm	≤ 6000 mm	✓	–	–	–	–
8° < Inclination ≤ 15°	≤ 4000 mm	≤ 6000 mm	✓	✓	✓	✓	✓
	4000 < B ≤ 5000		✓	–	–	✓	–
Inclination > 15°	≤ 4000 mm	≤ 6000 mm	✓	✓	✓	✓	✓
	≤ 5000 mm	≤ 5000 mm	✓	✓	–	✓	–

Technical drawings


Sections

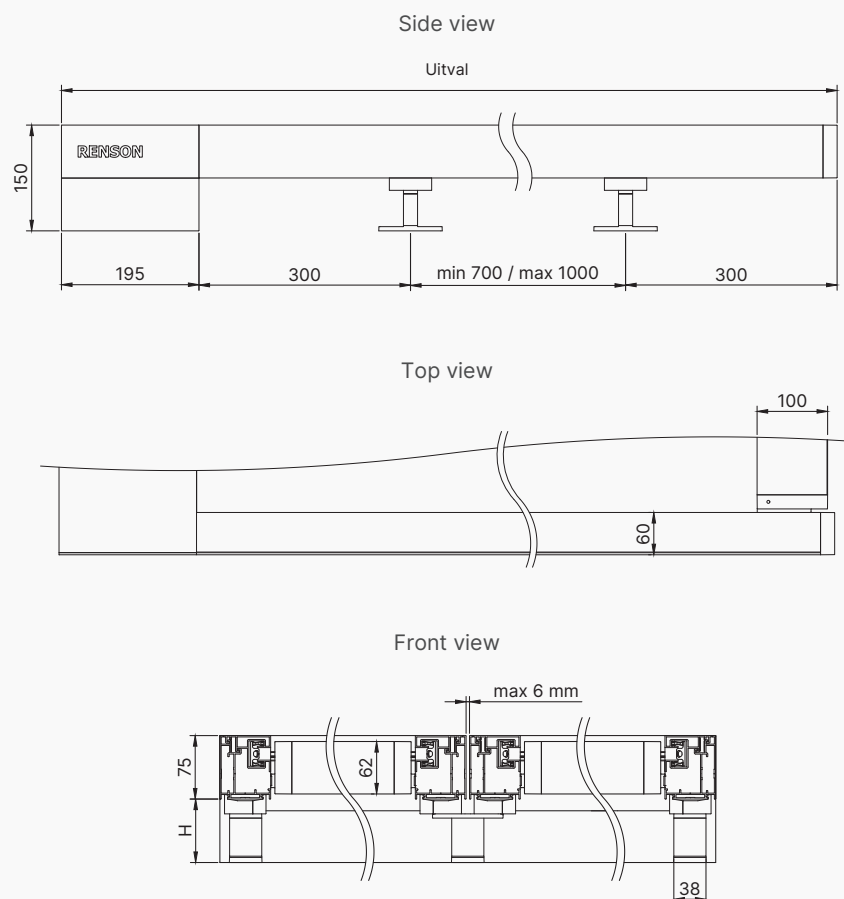


Bottom bar



Side guiding channel




Cable feed

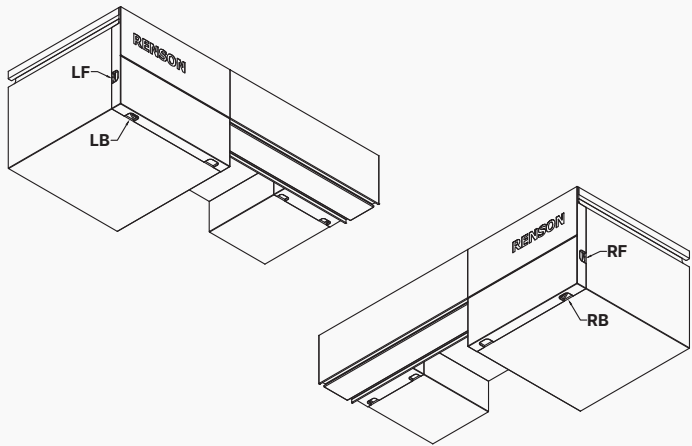


Feed	Feed location
B	rear
F	top

Mounting feet




Single



Double

H1 → H4
H1: 75 mm
H2: 110 mm
H3: 150 mm
H4: 180 mm

Exterior mounting

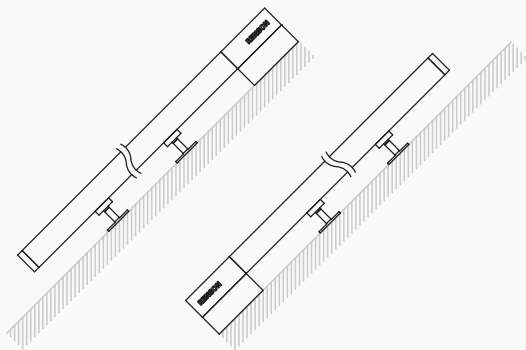

Interior mounting

