

Technical data

Design	
Head box dimensions (H x D)	180 × 170 mm
Head box extension	–
Square	✓
Retractable bottom bar	–
Base plate side guiding channel	At an angle of 0°
Wind resistance	
Wind classification EN 13561:2004+A1:2008	3
Guaranteed wind resistance	Up to 100 km/h in closed position
Control	
Detecto Rensonmotor Safety First	–
Rensonmotor electronic	–
Somfy mechanic motor	–
Rensonmotor radio-controlled	–
Somfy io radio-controlled	✓
Somfy (non-io) radio-controlled	✓
Somfy Maestria io	–



Fixscreen XL IM 7A F



Fixscreen XL IM 7B F


Dimensions

Dimensions single screen		
Fibre glass fabric Sergé	Min. width	3000 mm
	Max. width	7000 mm
	Max. height	3000 mm
	Max. surface	21 m²

Durability

Technology	
Fixscreen-technology	✓
Smooth-technology	✓
Click&Safe-technology	✓
Connect&Go-technology	✓
Certificates	
Declaration of Performance (DoP)	DOP-2015-SC002_rev 140325
Warranty	
10 year warranty on coating of aluminium profiles	✓
7 year warranty on Fixscreen-technology	✓
5 year warranty on electronic controls (motor & automation)	✓
5 year product warranty	✓
5 year warranty on fabric collection	✓
5 year warranty on gloss level	✓

Technical drawings IM 7A F

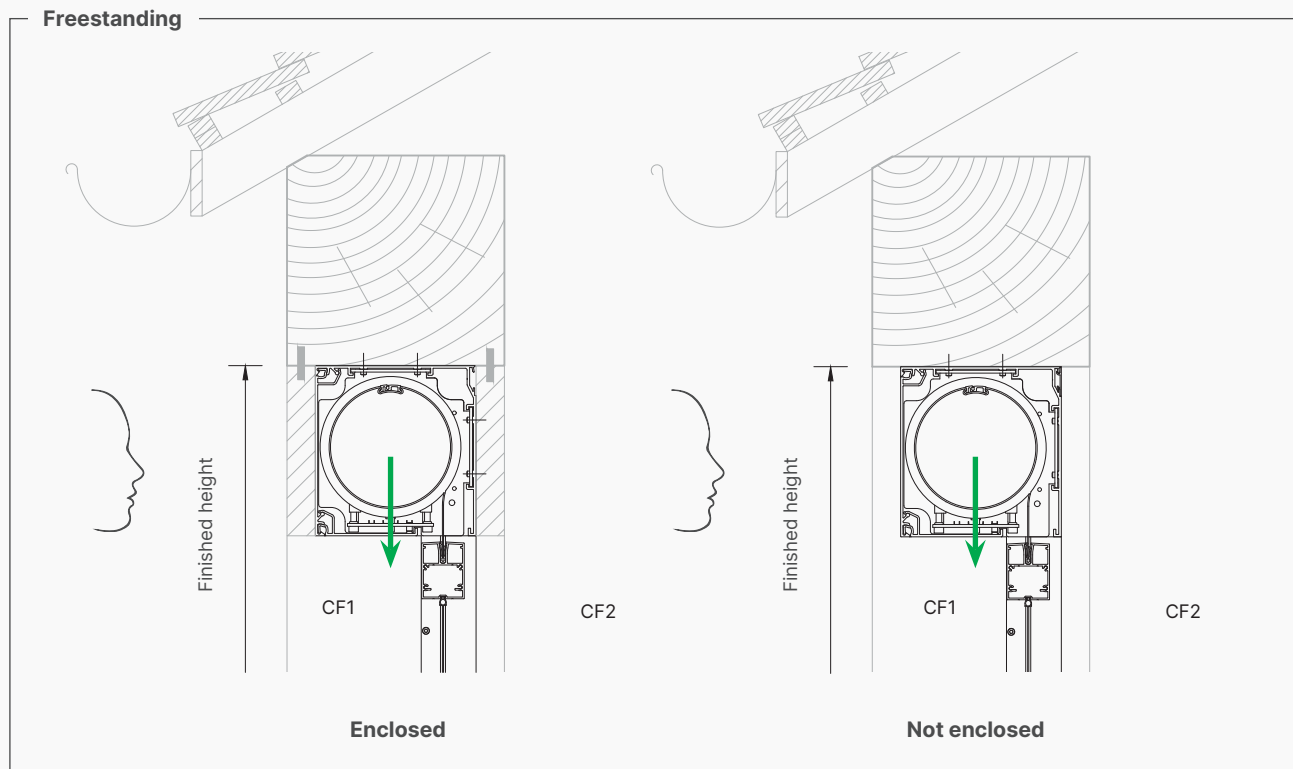


Viewing direction determines selection option cable feed left or right

 Direction in which fabric set should be demounted


Technical drawings IM 7A F

Head box

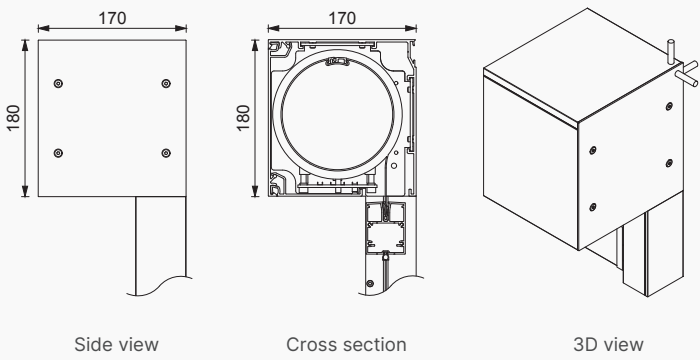


Side view
Cross section
3D view

Side guiding channel




Cable feed




Feed	Feed location
B	rear
F	top
H	side


Bottom bar




Hook profile

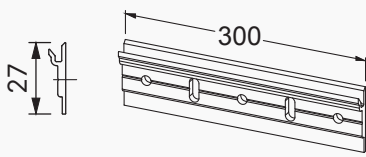

Fill profile

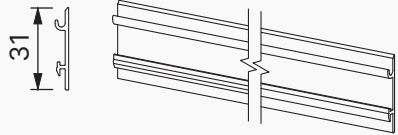

Technical drawings IM 7B F

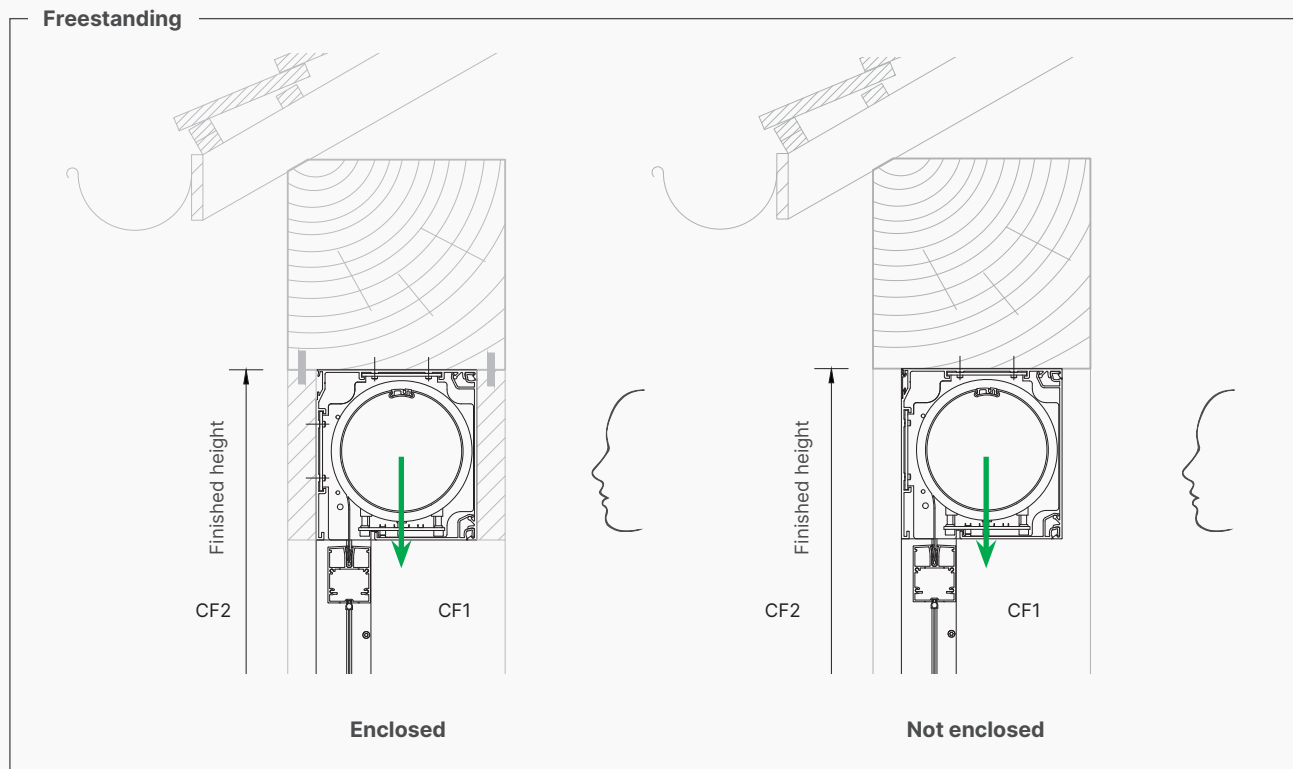


Viewing direction determines selection option cable feed left or right

 Direction in which fabric set should be demounted


Technical drawings IM 7B F

Head box

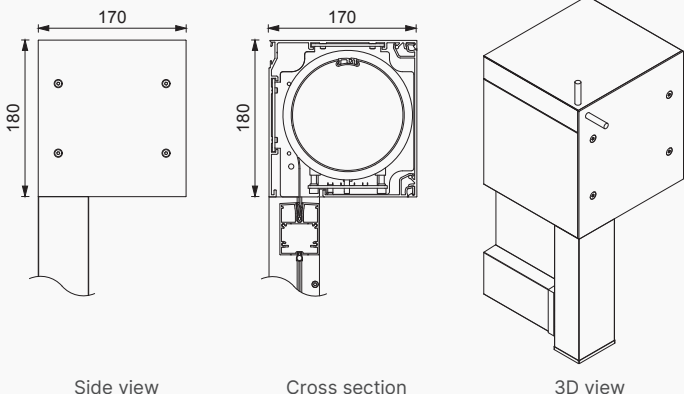


Side view
Cross section
3D view

Side guiding channel




Cable feed

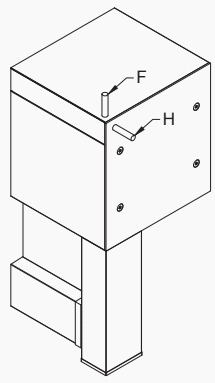


Feed	Feed location
F	top
H	side

Bottom bar



Hook profile

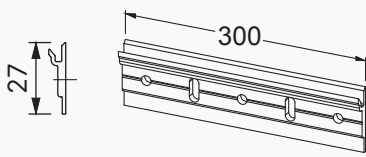

Fill profile

